

The heavy-duty hinged D-ring roof anchor is designed to be installed at the peak of a wooden roof. When properly installed, the roof anchor provides a safe anchorage point for personal fall arrest system with a minimum breaking strength of 5,000 lbs. (22.2 kN).

The heavy-duty hinged D-ring roof anchor has a hinge design for ease of installation on any roof peak angles. The hinged D-ring ensures correct alignment of the lifeline connector minimizing the risk of cross loading.

It is supplied with 16 screws #12 x 2 $\frac{1}{8}$ in. (73 mm) with #3 Phillips pan head.

⚠ WARNING


Always select an anchorage point that is capable of supporting 5,000 lbs. (22.2 kN).

APPLICABLE STANDARDS

- Manufactured in accordance with ANSI, OSHA and CSA requirements.
- Meets and/or exceeds 5,000 lbs. (22.2 kN) strength requirements for anchorage point.


AVAILABLE MODEL

- **428103S** Heavy-duty hinged D-ring roof anchor

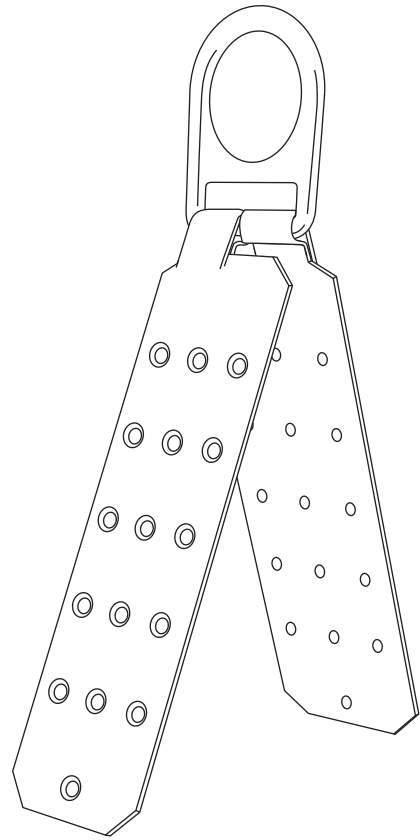

SPECIFICATIONS

CONSTRUCTION	Welded steel
MINIMUM BREAKING STRENGTH	5,000 lbs. (22.2 kN)
D-RING	Proof-loaded 100% at 3,600 lbs. (16 kN) Tensile strength: 5,000 lbs. (22.2 kN)
CAPACITY	310 lbs. (140 kg), one person

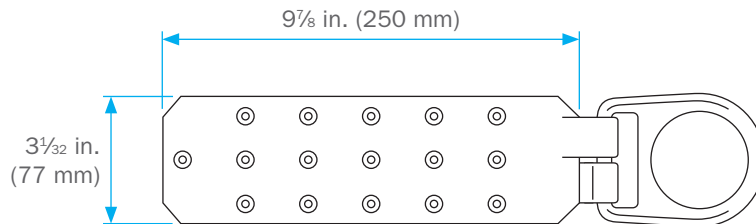

Specifications are subject to change without notice. Images are for illustrative purposes only.