


APPLICATION

The 13 mm static braided rope is the belay support for the Tractel Tirope hoist. This braided rope is available in lengths of 10-20-40-50 meters and more on request. It is equipped with a thimble loop and M15 connector at the top and a sewn stop at the bottom.

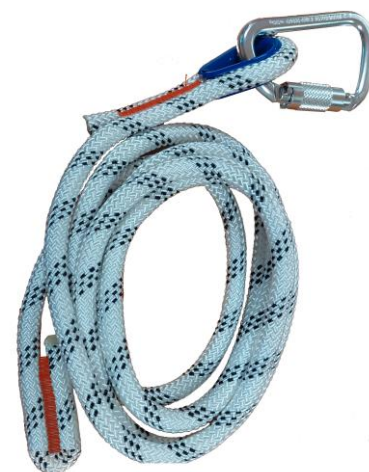

TECHNICAL SPECIFICATIONS

PA sheath (Polyamide)
PA core 6.6
D tex > 2 100
Freeness value 18
Mass / metre 99 g/m
Ø under 10+/-0.1 kg 13+/-05
Fibre resistance > 0.6 n/tex
Breaking strength on sewn termination > 2 530 daN
Connector M15 aluminium opening 23 mm – L: 107 mm – H: 10 mm – W: 57 mm

STANDARDS

The braided rope for the Tirope winch complies with standard **EN 1891/A** Static braided rope.

PRODUCTS CODES

Code	Description	Weight (kg)	Dimensions (A-B-C in mm)
087572	RLX A13.0 Tirope hoist 10 M-M15-A	1.3	Ø 300 X 100
087582	RLX A13.0 Tirope hoist 20 M-M15-A	2.4	Ø 350 X 100
087592	RLX A13.0 Tirope hoist 40 M-M15-A	4.5	Ø 350 X 200
087802	RLX A13.0 Tirope hoist 50 M-M15-A	5.6	Ø 370 X 200
100625	Carry bag	0.9	1 000 X 200 X 250

LOGISTICS INFORMATIONS

Code	Description	EAN Code	Weight (kg) with packaging	Packaging Dimensions (L*H in mm)
087572	RLX A13.0 TIROPE 10M-M15-A	3600230875729	1.5	Ø 300 X 100
087582	RLX A13.0 TIROPE 20M-M15-A	3600230875828	2.6	Ø 350 X 100
087592	RLX A13.0 TIROPE 40M-M15-A	3600230875927	4.7	Ø 350 X 200
087602	RLX A13.0 TIROPE 50M-M15-A	3600230878027	6.8	Ø 400 X 200
100625	Carry bag	3600231006252	0.9	1 000 X 200 X 250