

## DESCRIPTION

guard trac™ WP is an extension of our self-standing guardrail system for edge protection. It is certified to applicable standard EN 13374-A:2019.

In most of the installations, there is a parapet around the area to protect, as part of the building structure:




In such cases, it avoids objects rolling out of the roof, but it also has enough stiffness to be used as support. So,

## TECHNICAL CHARACTERISTICS

The guard trac™ WP main features are:

- Barriers have been re-designed, as they do not need the locking device used to mark the angle between two adjacent barriers. Both versions guard trac™ WP & WPS use the same barriers.
- This system is fully compatible with the standard guard trac™, so all elements can be swapped.
- Standard bracket to be used (752 mm long), which includes anti-slip pad, wedges and springs.
- Only one counterweight per in-between bracket and two in-a-row counterweights at free-end brackets.
- No counterweight interfaces to be used.

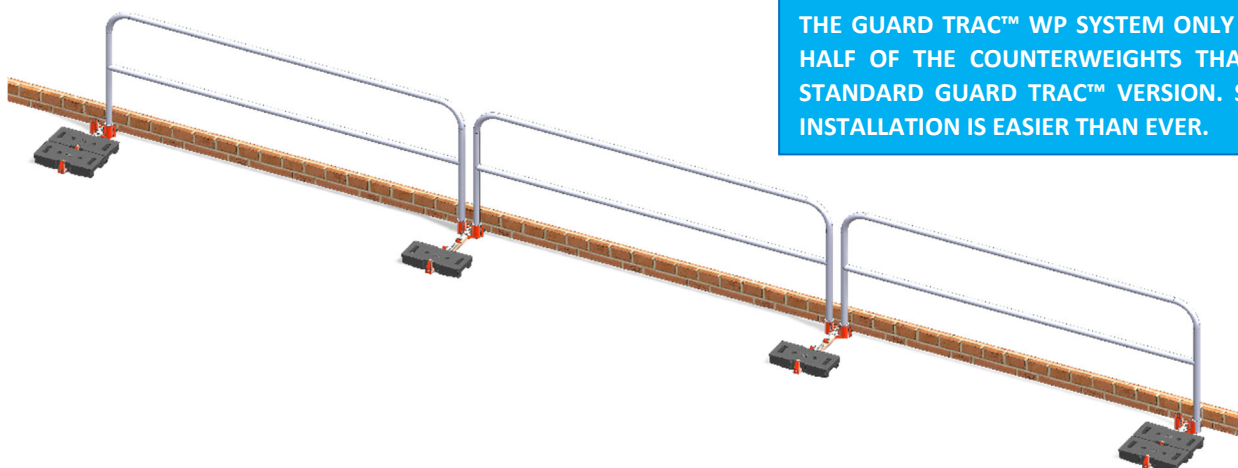

So, the guard trac™ WP system components are:

- guard trac™ WP & WPS barrier
- Fully equipped long bracket
- Counterweight

taking profit of this layout, the guard trac™ system has been optimized, resulting in a new system with the same performance but lower cost by meter.

guard trac™ WP use less counterweights, resulting in monetary and installation-time savings. They also do not need a locking device between guardrails. So, there is no angle restriction, as the parapet acts as a guide line to orient the guardrails.




As its predecessor, the guard trac™ WP can be used in dry as well as wet condition, and it is certified for installation on flat roof with the following roof sealant:

- EPDM
- Bitumen
- PVC

No tool is required for the installation of guard trac™: it is a completely installation tool free. The design and lightweight of each component guarantee an easy and fast installation.

guard trac™ WP must be installed on the edge of a flat roof with parapet, with a minimum height of 150 mm.
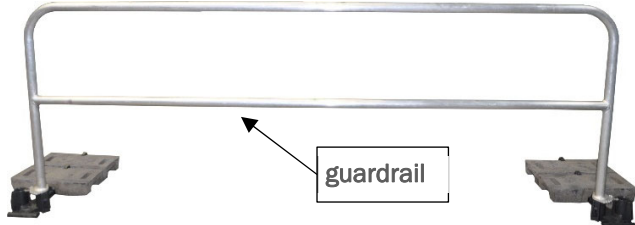
## MAIN COMPONENTS AND CODES

guard trac™ guardrails																							
		The guard trac™ WP & WPS guardrail is available in different lengths:																					
<table border="1"> <thead> <tr> <th>Guardrail</th> <th>Code</th> <th>Length</th> <th>Weight</th> </tr> </thead> <tbody> <tr> <td>3 m</td> <td>272567</td> <td>3000 mm</td> <td>9.4 kg</td> </tr> <tr> <td>2.5 m</td> <td>272557</td> <td>2500 mm</td> <td>8.2 kg</td> </tr> <tr> <td>2 m</td> <td>272547</td> <td>2000 mm</td> <td>7.1 kg</td> </tr> <tr> <td>1.5 m</td> <td>272537</td> <td>1500 mm</td> <td>5.9 kg</td> </tr> </tbody> </table>	Guardrail	Code	Length	Weight	3 m	272567	3000 mm	9.4 kg	2.5 m	272557	2500 mm	8.2 kg	2 m	272547	2000 mm	7.1 kg	1.5 m	272537	1500 mm	5.9 kg	<ul style="list-style-type: none"> <li>• Material: aluminium</li> <li>• Overall dimensions: Length x 1101 x 120 mm</li> </ul>		
Guardrail	Code	Length	Weight																				
3 m	272567	3000 mm	9.4 kg																				
2.5 m	272557	2500 mm	8.2 kg																				
2 m	272547	2000 mm	7.1 kg																				
1.5 m	272537	1500 mm	5.9 kg																				
Fully equipped long bracket		Counterweight																					
 <p>The fully equipped brackets are designed to hold the guardrail and must be in contact with the parapet.</p> <ul style="list-style-type: none"> <li>• Code: 217447</li> <li>• It includes:                             <ul style="list-style-type: none"> <li>○ 1 double brackets in cast iron</li> <li>○ 1 anti-slip in EPDM</li> <li>○ 2 plastic clamping wedges with their spring</li> </ul> </li> <li>• Weight: 7 kg</li> <li>• Overall dimensions: 752 x 222 x 111 mm</li> </ul>		 <p>The central groove is designed for its installation on the double bracket.</p> <ul style="list-style-type: none"> <li>• Code: 186938</li> <li>• Material: reinforced concrete</li> <li>• Weight: 25 kg</li> <li>• Overall dimensions: 487 x 222 x 90 mm</li> </ul>																					