

Hand-held remote readout

Specifications:

Suitable for use with :

- . all DYNAFOR™ LLX units
- . all DYNAFOR™ MWX units,
with LCD (liquid Crystal Display)

Display :

- . LCD, 5 digits, 18 mm high.

Protection index: IP 40.

Power supply :


- . 9V battery, PP3/6LR61, with low battery
pilot light

Controls :


- push-button controls for TAPE and PEAK HOLD
- separate ON/OFF switch to operate simulta-
neously the remote read out and the Dynafor™
to which it is connected.

Dimensions : 170 mm x 85 mm x 38 mm.

Weight : 300 gr

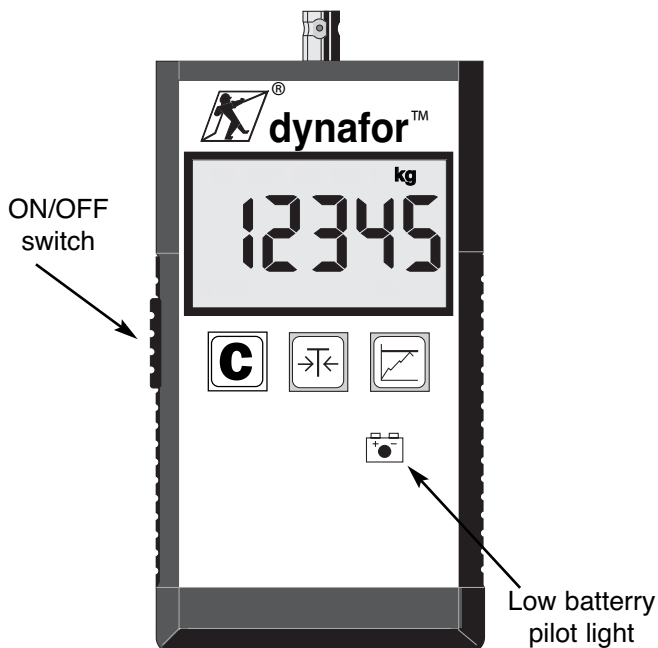

Several hand-held remote readouts may be linked together using BNC T-pieces, in parallel with a single DYNAFOR™. The whole system may also be connected to the mains power supply via a transformer.

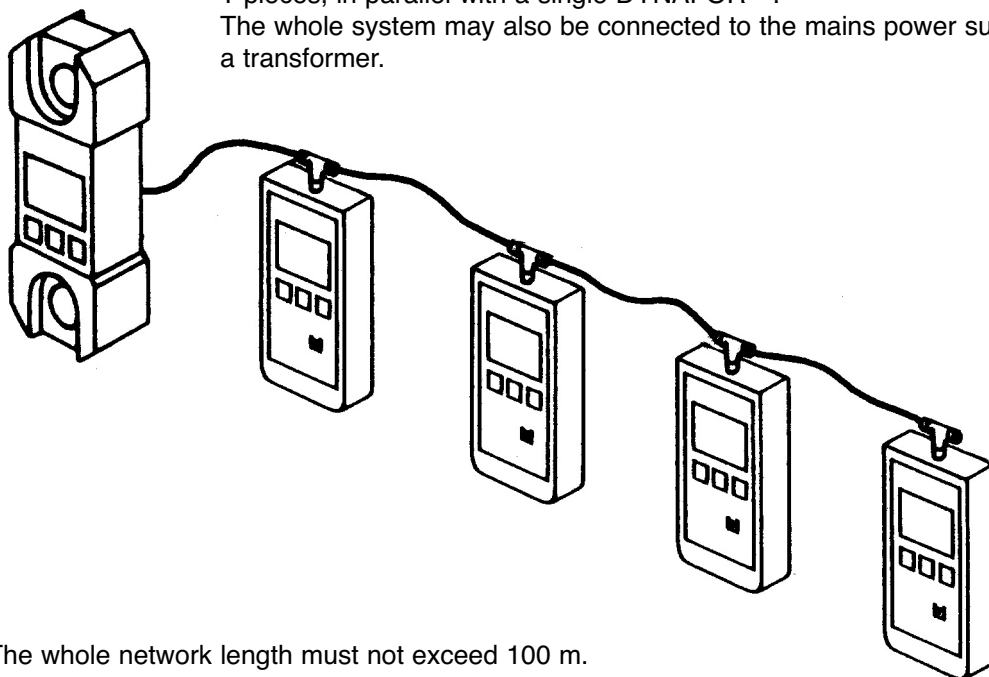

The whole network length must not exceed 100 m.