


APPLICATION

Anchor slings are exclusively designed for anchoring a personal fall protection system, for example a reel of rope with a stopfor™ fall arrester.

Anchor slings comply with standard EN795 type B for transportable temporary anchorage devices. They are used to create an anchorage point on a structure which provides sufficient resistance (> 13kN).

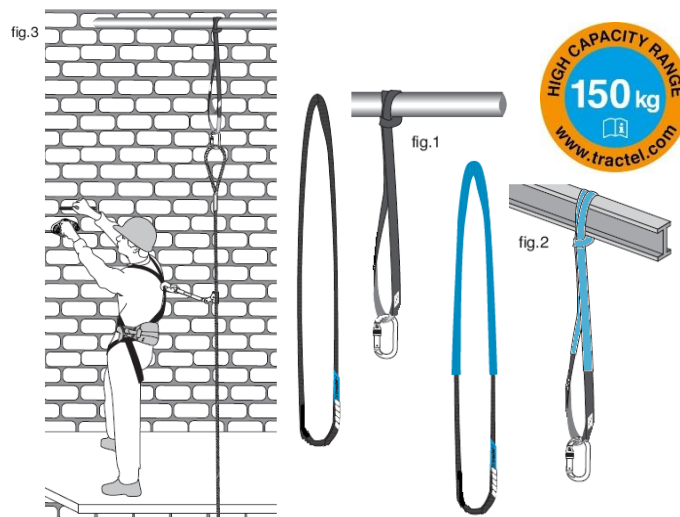

TECHNICAL CHARACTERISTICS

- Temperature range - 30°C à + 60°C.
- Material: polyester

DESCRIPTION

The anchor slings are available in two versions:

- A lightweight version (fig.1), which is available in different lengths: 0.6 to 2m. The sling is made of 30 mm stitched polyester webbing.
- The anchor slings can be reinforced with a tubular sheath (fig.2). The sheath provides optimum protection against cuts and abrasion. Tractel® recommends the reinforced version as it provides a level of reliability and durability which is compatible with conditions encountered on building sites.

APPLICABLE STANDARDS

- CE type examination certificate issued by Apave in accordance with standard EN 795 type B/2012 and CENTS16415/2013.

CODES

DESIGNATION	CODE	EAN CODE
AS30S 0,60	57272	3600230572727
AS30S 0,80	57282	3600230572826
AS30S 1,00	57292	3600230572925
AS30 1,20	59372	3600230593722
AS30 1,50	59382	3600230593821
AS30 2,00	59392	3600230593920
Option :		
Tubular sheath	18192	3600230181929