

APPLICATION

Tractel's new Tracpode anchor point is a temporary anchor point. Its compact size makes it easy to transport in small site vehicles, and it is lightweight and easy to handle.

The Tracpode PRO anchor point is designed for people accessing confined spaces, such as silos, sewers, etc....

The head of the Tracpode PRO anchor point has 3 anchor points. Two 150 kg PPE anchors and one 250 kg load lifting anchor.


One leg is designed to hold a 150 kg Tractel winch (lifting equipment) or a Tractel Blocfor R 150 kg fall arrester.

When the Tracpode PRO anchor point is used with a hoist for lifting equipment or a fall arrester fixed to the strut, it must be equipped with a pulley under its head for lifting loads or an PPE pulley for the fall arrester to guide the ropes.



NB: The pads can be fitted with an anti-slip strap when the Tracpode PRO anchor point is used on slippery or loose ground.

TECHNICAL CHARACTERISTICS

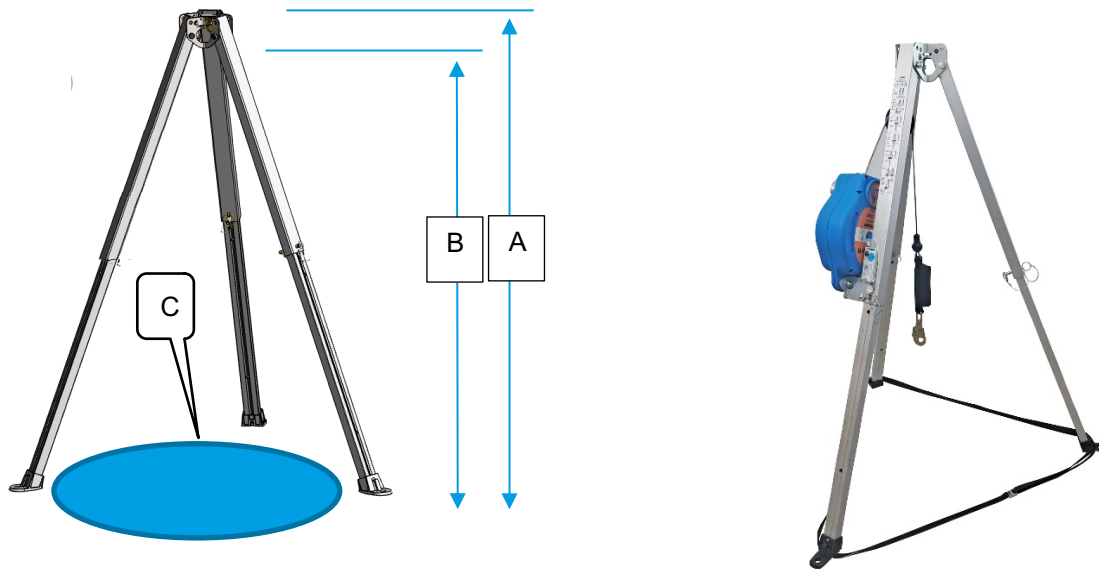

Leg position	Height (A)	Height under head (B)	Diameter defined by the 3 feet
Closed	1.12 m		
Opening pos. 1	1.52 m	1.41 m	1.23 m
Opening pos. 2	1.57 m	1.46 m	1.27 m
Opening pos. 3	1.62 m	1.51 m	1.31 m

- The Tracpode PRO is made of aluminium and weighs 11.90 kg bare.
- It is adjustable. Its maximum height when unfolded is 1.62 m.

- In the position of use (3 legs locked on the head), the maximum diameter at ground level passing through the three feet is 1.31 m.
- The legs have 3 height adjustment holes spaced 5 cm apart.
- When lifting a load under the head, the maximum WLL is 250 kg.
- When lifting a load on the leg, the maximum WLL is 150 kg.
- One of the 3 legs can be equipped with either:
 - A Blocfor R EVO ESD 150 kg: self-retracting fall arrester with its specific Tractel-manufactured bracket,
 - A CaRol R PRO 12: rescue and load lifting winch with its specific Tractel-manufactured bracket,
 - A CaRol R PRO 20 or CaRol R TS 150 kg: person rescue and load lifting winch with its specific Tractel-manufactured bracket.
 - A caRol Duratech 150kg: load lifting winch with its specific Tractel-manufactured bracket
- When the Tracpode PRO anchorage point is equipped with a Blocfor R EVO ESD 150 kg + bracket assembly, a Tractel PPE pulley kit must be attached under the head.
- When the Tracpode PRO anchorage point is equipped with a CaRol R PRO or CaRol R TS + bracket assembly, a Tractel load lifting pulley kit must be attached to the anchorage point under the head.
- The head of the Tracpode PRO anchor point is equipped with spring-loaded automatic locking buttons to lock the legs in the working position and in the transport position, thus eliminating the need for cable ties.
- The feet of the Tracpode PRO anchor point are equipped with non-slip rubber pads. These pads are drilled to allow the Tracpode PRO to be fixed to the ground.
- The pads can be fitted with an anti-slip strap when the Tracpode PRO anchor point is used on slippery or loose ground.
- The under-head anchor points have a diameter of 51 mm / 2 inches, making it easy to attach connectors.

APPLICABLE STANDARDS

PPE Standard:

- EN795B/2012
- CEN/TS 16415 for use by two people weighing 150 kg

Lifting standard:

- Machinery Directive 2006/42/EC

CODE

Code	Description	Weight (without pakaging)	Size (without pakaging)
299049	Tracpode PRO	11.9 kg	190 x 190 x 1 120 mm

LOGISTIC INFORMATIONS

Code	Description	Code EAN	weight (incl. pakaging)	Size (with pakaging)
299049	Tracpode PRO	3600232990499	13.1 kg	200 x 200 x 1 200 mm

RELATED PRODUCT

Code	Designation
087492	Blocfor 20R EVO Galva - M47
087742	Blocfor 10R EVO Galva - M47
087502	Blocfor 20R EVO Inox - M10I
299249	CaRol R TS 150 kg winch without bracket + 20m wire rope
218438	CaRol R PRO 12 - 150 kg winch without bracket + 12m wire rope
218458	CaRol R PRO 20 - 150 kg winch without bracket + 20m wire rope
218498	CaRol DURATECH - 150 kg winch without bracket + 12 m wire rope
218428	Tracpode PRO bracket for Blocfor 20R EVO
218448	Tracpode PRO bracket for CaRol R PRO 12 /CaRol Duratech winches
218468	Tracpode PRO bracket for CaRol R TS 20 / CaRol R PRO 20 winches
218408	150 kg PPE pulley
218418	150 kg material lifting pulley