


Application

The Tractel® tracrod 150 kg anchor rod is a transportable anchor point which enables two operators, each weighing up to 150 kg, to work in safety. To install it ready for use, the tracrod 150 kg anchor rod is inserted into a stainless steel support mount which is secured in place permanently at the place of work

When the opening plate of the manhole is not perfectly in alignment with the reception structure, the tracrod spacer must be installed to install the tracrod anchor rod in its base.

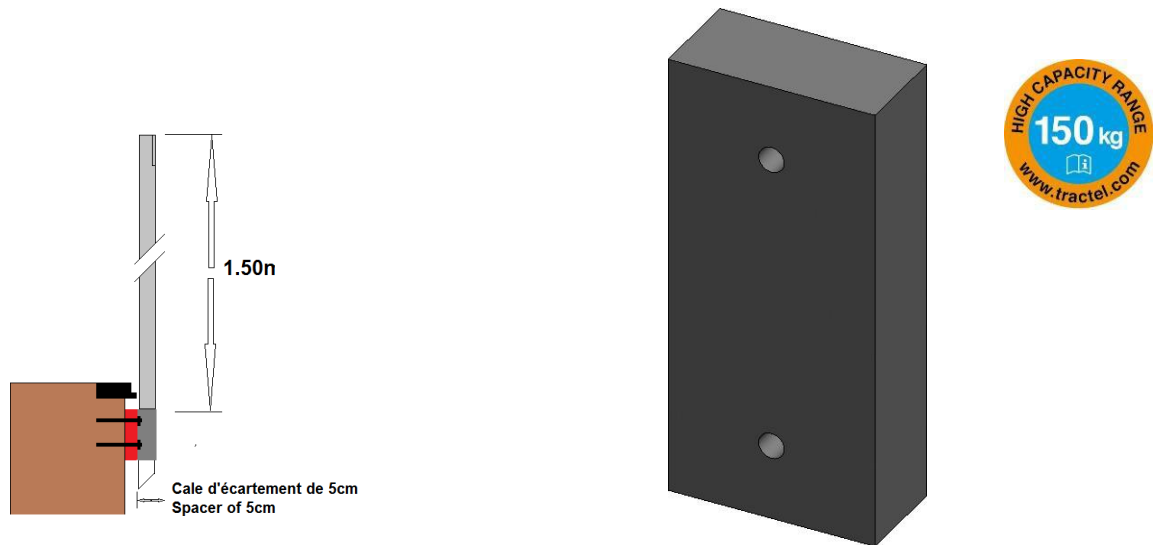

The spacer is installed with 2 chemical anchors of 12mm it is the same chemical anchor as the anchors base and does not require any specific tools.

NB: The chemical anchors are not supplied with the base. They must be compatible with the belay support.

Caractéristiques techniques

code N°	Description	Quantity mini	Size L x W x H mm	Weight kg With packaging	Description
207358	5 cm-thick spacer block	1	226X104X50	1.3kg	SAC PU

Standard:

The tracrod 150 kg anchor rod meets the requirements stated in the following standards:

- ✦ EN795A/2012 Personal fall protection equipment - anchor devices, and can be fitted with two, 150 kg fall-arrest devices which comply with the requirements stated in standard EN 363 (EN 355-EN 353.2-EN 360) or with evacuation systems EN341
- ✦ To support a blocfor™ 20R or 30R 150-kg bracket, EN 360 - EN 1496

Code:

designation	New code	Code stat	EAN
5 cm-thick spacer block	207358	42180	3600232073581