
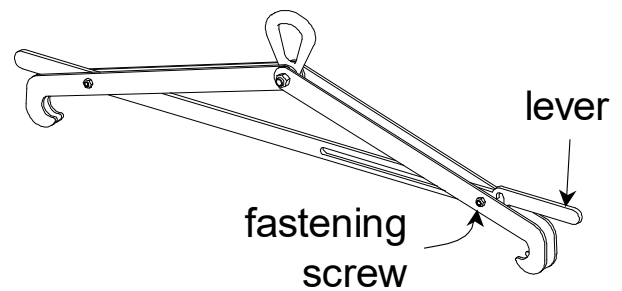


APPLICATIONS

Lifting of standard steel drums with edges in horizontal position and with length 440 to 920 mm.

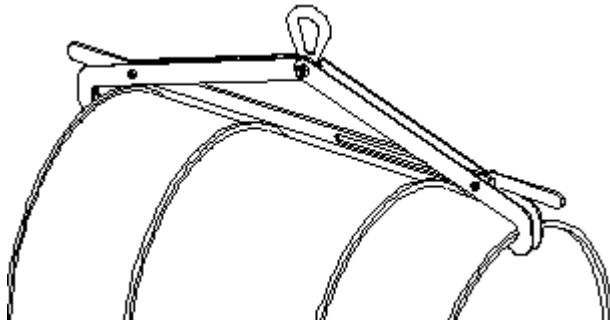

DESCRIPTION

Accessory equipped with an automatic locking system allowing the drum's laying down without any manual intervention. Clamping is proportional to the load, thus minimising the damage risk to the drum.

FUNCTIONING

Place the clamp locked open over the drum. Lift up the lever while starting off the lift and holding it in the up position to prevent it from locking again against the fastening screw. When laying down, the clamp automatically locks itself open.

IMPORTANT INSTRUCTIONS

- Only lift standard steel drums with edges on each side with HF clamp.
- Never turn drums thanks to this clamp.
- HF is not suitable for plastic drums.
- For safety's sake, transport the clamps by its red hook ring in the open position (activated lock).
- Working temperature: -20° to +100°C.

GENERAL CHARACTERISTICS

- Manufactured without load bearing welds.
- Hot epoxy coating.
- Safety factor: 3 in accordance with the EN 13155.2003 norm.
- Product conforms to the French regulation, in particular the decree of 01/03/2004 relating to the check on lifting devices and the European Directive n°98/37.
- Product with EC marking and delivered with a declaration of conformity and instructions for use.

DIMENSIONAL CHARACTERISTICS

Ref.	Group code	WLL kg	Opening		A		B		C		D		E		F	G		H	I	Weight kg
			min	max							min	max	min.	opening max.						
HF05-440-920	50208	500	440	920	52	69	18	12	564	1003	1088	568	300	60	32	6				

Dimensions in mm

