


APPLICATIONS

Provides an hanging point on fork lift trucks to handle loads.


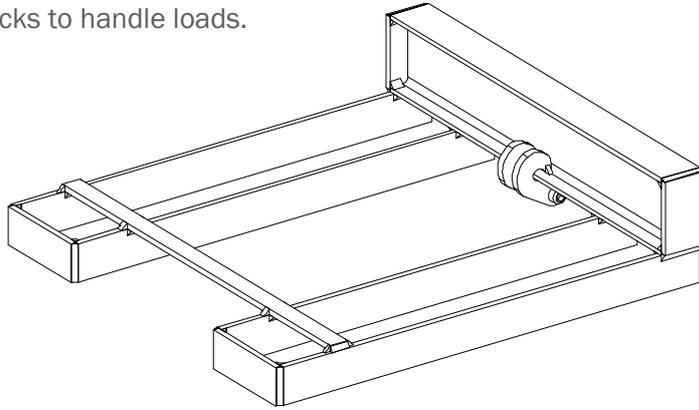


DESCRIPTION

These accessories are fitted with an immobilizing system on the fork lift truck tines ensuring that lifting operations are performed safely.

FUNCTIONING

Position the fork lift truck tines to about 50 cm from the floor and check their spacing. Fit the adaptor onto the tines (hanging point downwards) and butt it against the tines' vertical uprights. The adaptor is then immobilized.

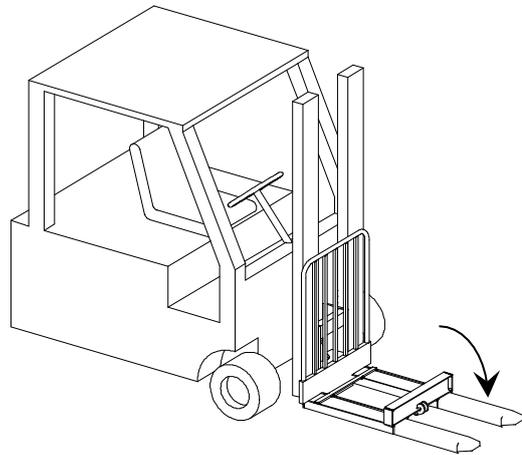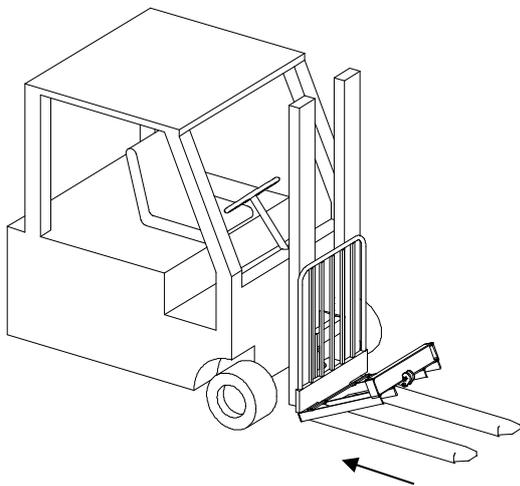

IMPORTANT INSTRUCTIONS

- Ensure the adaptor is correctly driven home against the fork lift truck's tines.
- If Tractel Solutions does not provide the hook, ensure its WLL is the same as the adaptor one.
- Working temperature: -20° to +100°C.



GENERAL CHARACTERISTICS

- Manufactured without load bearing welds.
- Hot epoxy coating.
- Safety factor: 3 in accordance with the EN 13155.2003 norm.
- Product conforms to the French regulation, in particular the decree of 01/03/2004 relating to the check on lifting devices and the European Directive n°98/37.
- Product with EC marking and delivered with a declaration of conformity and instructions for use.

DIMENSIONAL CHARACTERISTICS

Ref.	Group code	WLL kg	A	B	C	D	E	F	G	H	I	J	ØK	Weight kg
PC1,5-120	50528	1 500	284	120	70	20	12	500	50	150	24	20	12	15
PC3-170	50538	3 000	484	170	80	22	16	600	50	170	18	22	16	23
C125E	104999	1 500	HR swivel hook with safety catch											
C127E	105019	3 200												

Dimensions in mm

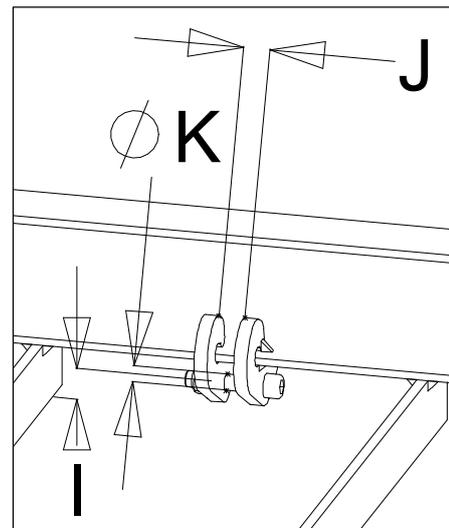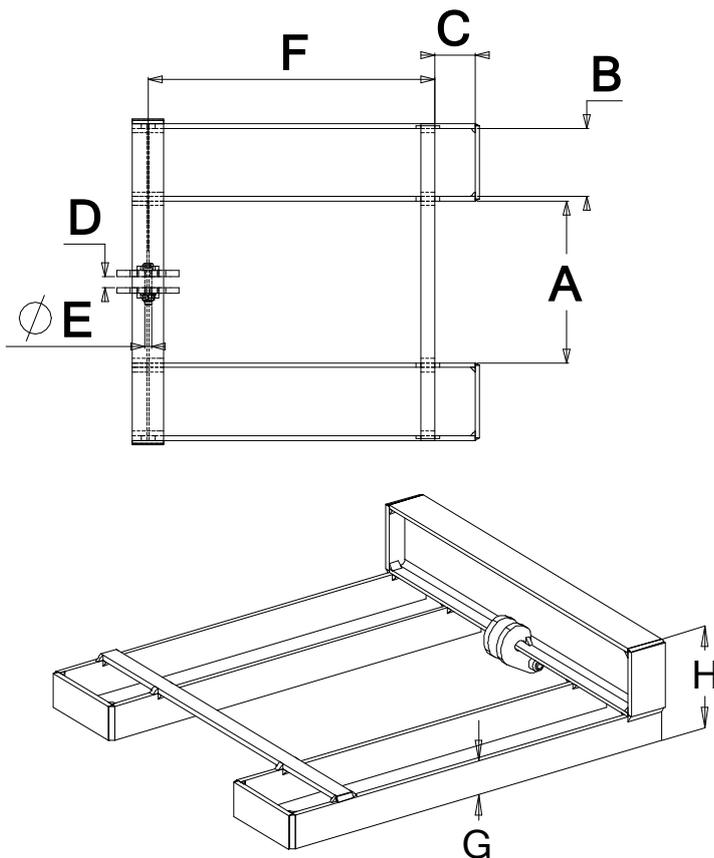

OPTIONS ON REQUEST

- Other lifting hook adaptor brackets.