


APPLICATIONS

Cable drum lifting.

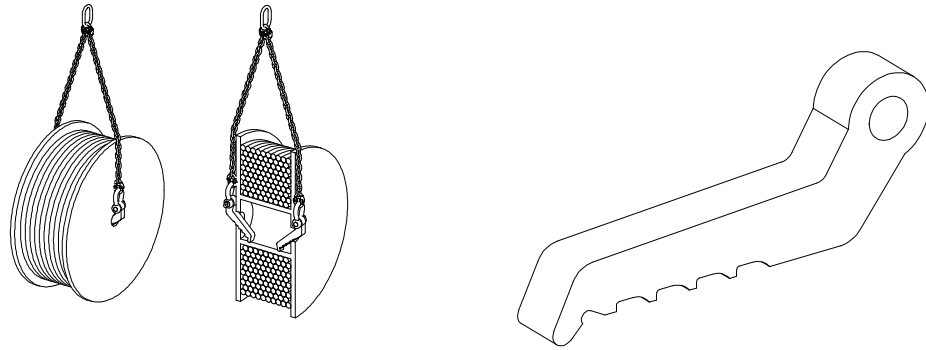

DESCRIPTION

These accessories are adapted to many cable drums*. They fit holes with diameters from 55 to 83 mm. Slings and shackles not provided.

* ABN/ BBN/ CBN/ DBN/ EBN/ FBN/ GBN/ HBN/ IBN type following NF B 55-007 French standard.

FUNCTIONING

Once both shackles and 2-legged cable/ chain/ textile slings have been put together with the hooks, insert them either side of the cable drum axle, teeth downwards. Lifting ensures the hooks' locking in position.

IMPORTANT INSTRUCTIONS

- The hooks and cable drums' bearing surface must be free from grease or oil.
- Insert hooks in the right direction, ie. teeth downwards.
- Working temperature: -20° to +100°C.

GENERAL CHARACTERISTICS

- Manufactured without load bearing welds.
- Hot epoxy coating.
- Safety factor: 3 in accordance with the EN 13155.2003 norm.
- Product conforms to the French regulation, in particular the decree of 01/03/2004 relating to the check on lifting devices and the European Directive n°98/37.
- Product with EC marking and delivered with a declaration of conformity and instructions for use.
- For use with 6.5t shackle according to EN 13889
 - inner width at the axis $W = 36.5 \pm 3$ mm
 - axis $\varnothing D = 25 \pm 2$ mm

DIMENSIONAL CHARACTERISTICS

Ref.	Group code	WLL/ pair kg	A	B	D (min)	E (max)	L	Weight/ pair kg
T013	51198	13 000	265	112	28	32	180	5

Dimensions in mm

