

## APPLICATIONS

- The CLD chain locking device ensures the function of adjustable low limit stop on a bravo™ lever hoist when lowering a load.
- The chain locking device can be used with bravo™ lever hoists for load lifting, load pulling and rope tensioning applications.
- The CLD can be used on COROLIM type gray chain or black chain.
- This accessory can only be used on bravo™ lever hoists manufactured by TRACTEL®.
- This accessory adapts to all bravo™ lever hoists manufactured by TRACTEL® in compliance with the size of the chain.


**Note:** The chain locking device can be used with tralift™ chain hoists for load lifting applications **ONLY**.

## CHARACTERISTICS


- The CLD is attached to the end of the chain using a CHC screw and a self-locking nut.
- The CLD slides and locks itself on the chain as close as possible to the structure of the hoist.
- The CLD can be fit on all hoists 1 fall and multi fall.
- The CLD withstands 2.5 times WLL\* of the lever hoist without failure in accordance with EN13157

(\*: Working Load Limit)

Figure :

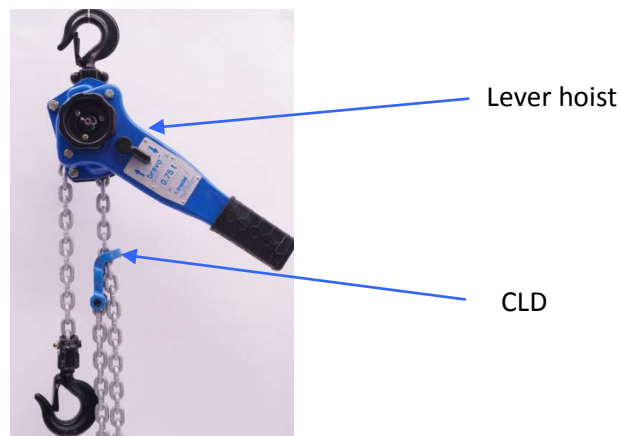

## TECHNICAL SPECIFICATIONS

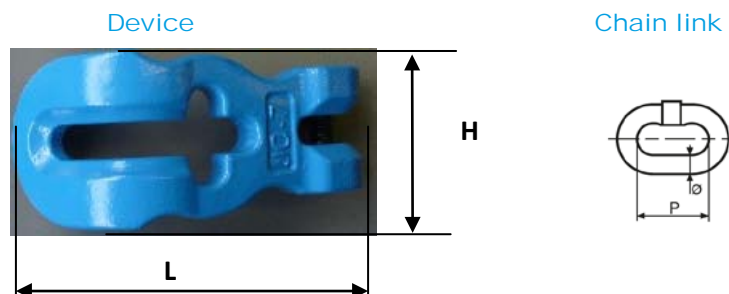

Product designation	Chain locking device CLD4/5	Chain locking device CLD6	Chain locking device CLD7/8	Chain locking device CLD10
Chain dimensions (ØxP) in mm	Ø4x12 & Ø5x15	Ø6x18	Ø7x21 & Ø8x24	Ø10x30
CLD dimensions (LxH) in mm	70x34	85x42	110x52	130x64
CLD weight in gr.	140	240	480	760
TSAS product code	196438	196448	196458	196468